



PERFORMANCES

MODELS	m ³ /h	l/s	Pa	W	A	dB(A)*
EXT 100	217	60	268	28	0,13	44
EXT 125	269	75	259	28	0,13	44
EXT 150 A	426	118	322	56	0,24	56
EXT 150 B	708	197	467	110	0,48	59
EXT 160 A	433	120	309	56	0,24	56
EXT 160 B	755	210	480	120	0,53	61
EXT 200 A	793	220	486	120	0,53	61
EXT 200 B	908	252	609	158	0,70	65


*LpA measured at 3m in open field 230V-50Hz.




Comply with ErP Directive 2009/125/CE and UE Regulation 1253/2014. Residential Ventilation Unit. To comply with the ErP2018 parameters, a local demand controller must be used.

- High performance centrifugal fans for outdoor installation.
- Ideal in environments where aesthetics, space or noise level are of concern.
- Easy and cost-effective solution for a centralized ventilation requirement.
- 8 models Ø100 to 200 mm
- Steel housing with epoxy finish.
- Ball bearing motor. Backward curved blades.
- EC Version available

INSTALLATION

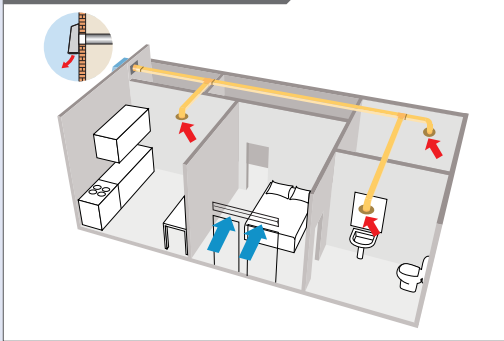

DIMENSIONS



MODELS	A	B	C	D	ØE	Kg
EXT 100	260	355	92	131	98	4,8
EXT 125	260	355	92	131	122	4,8
EXT 150 A	260	355	92	131	148	5
EXT 150 B	360	450	116	155	148	7,4
EXT 160 A	260	355	92	131	158	5
EXT 160 B	360	450	116	155	157	7,4
EXT 200 A	360	450	116	155	198	7,4
EXT 200 B	360	450	116	155	198	7,4

CURVES

